

RSP-1582
7.1 Home Theater Surround Processor / Preamp



ROTEL



The RSP-1582 has been two years in the making and is a wholly new platform. Rotel engineers evaluated painstakingly every circuit design and feature requirement. It is built with a modular construction to facilitate upgrades of key internal circuit boards, and is software updateable over the Internet or via a simple USB download if a network connection is not available.


The RSP-1582 is a home theatre preamplifier/processor, of course, but first and foremost, it truly shines as an audio component. For example, six Wolfson 24bit/192kHz devices are arrayed as four independent DACs for Front Left, Front Right, Center and Subwoofer channels with shared stereo DACs for the rear channels. This topology offers exemplary performance all around, but provides the absolute best quality on the most critical channels. In theater mode, a Texas

Instruments Aureus DSP high-performance decoder is utilized with 10-channel Parametric Equalization. A high performance Texas Instruments Analog-to-Digital converter is used to facilitate optimum conversion of analog signals for playback in surround sound modes. Balanced XLR and single ended connections are offered, and the audio stages use premium components in all signal critical applications. For pure stereo playback of analog sources, the RSP-1582 features an analog bypass to obtain the cleanest path.

For video use, the preamp/processor incorporates eight HDMI 4K video inputs (no scaling) with two HDMI 4K video outputs. The RSP-1582 also employs a Silicon Image 2K/4K HDMI transceiver. Its modular HDMI circuit construction means future upgrades can be accommodated easily.

RSP-1582

7.1 Home Theater Surround Processor / Preamplifier

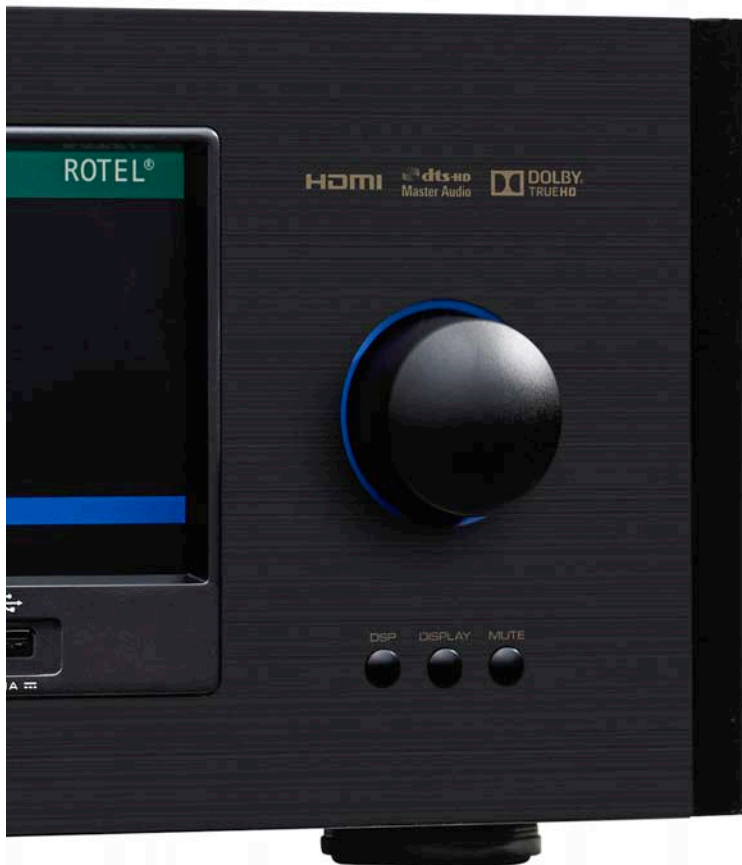

If you are passionate about home theater and are looking to create the highest quality audio/video system possible, you need to begin with a reference level preamp/processor.

Other features include one front panel HDMI input with 4K video pass-through, built-in aptX Bluetooth technology, a PC-USB input that supports 24 bit /192kHz audio, CD, Tuner and 4 AUX analogue inputs, along with a multichannel input and XLR input. It even has a phono stage!

There is a seven-inch TFT display on the front panel to provide easy adjustments to all audio and video parameters without the need to turn on an external display or video projection system – perfect for when the equipment rack is remote located. And the RSP-1582 comes with rack ears in the box to make such installations easy.

In addition to its unassailable audio and video performance, custom installers will find the RSP-

1582 ideal for any installation application with an RJ45 network connection, Internet or USB front panel software updates, three source independent trigger outputs, a wired IR remote input, RS232 and IP interface for automation system control, 2 x IR output connectors for IR pass-through and front panel setup navigation control.

All of these features and technology mean nothing, though, if the end result doesn't meet your performance expectations. That's why Rotel engineers spend countless hours measuring, listening and refining the circuitry. The end result is a surround processor/ preamplifier that is worthy of the finest music systems and theaters at an unrivalled price.



RSP-1582

7.1 Home Theater Surround Processor / Preamplifier



SPECIFICATIONS

Audio		Video	
Total Harmonic Distortion	<0.008%	HDMI standard	Audio Return Channel, 3D, Deep Color, 2K, 4K Pass-Through
Intermodulation Distortion (60Hz : 7kHz, 4:1)	<0.008%	Input Resolutions	480i, 576i, 480p/576p, 720p, 1080i, 1080p, 1080p 24Hz, 2K, 4K
Frequency Response	10Hz - 100kHz, ±1.5dB (Analog Bypass) 10Hz - 20kHz, ±0.3dB (Digital Input)	Output Resolutions	480i, 576i, 480p/576p, 720p, 1080i, 1080p, 1080p 24Hz, 2K, 4K
Signal to Noise Ratio (A-weighting)	100dB (analog bypass) 92dB (Dolby Digital, DTS) 0dBFS	Deep Color Support	24bits
Input Sensitivity		Power	
Line Level:	250 mV/100k ohms	Power Requirements	
Balance Level:	250 mV/100k ohms	USA:	120 Volts, 60 Hz
Output Level		EC:	230 Volts, 50 Hz
Line Level (RCA):	1.0 V	Power Consumption	45W
Balance Level (XLR):	2.0 V	Standby Power Consumption	<0.5W
Channel Separation	>75 dB (at 10kHz)	BTU	140 BTU/h
Digital Audio	Dolby Digital, Dolby Digital EX, DTS, DTS-ES, DTS 96/24, DTS-ES 96/24, LPCM (up to 192kHz 24bits)	Dimensions (W x H x D)	431 x 188 x 417mm 17 x 7 2/5 x 16 2/5 in
Lossless Compressed Digital Audio	Lossless Compressed Digital Audio Dolby® TrueHD, Dolby® Digital Plus, DTS™ HD Master Audio	Front Panel Height	4U (177mm, 7 in)
		Weight (net)	12 kg, 26.46 lbs

Rotel of America
54 Concord St.
N. Reading, MA 01864 USA
T +1 978 664 3820
F +1 978 664 4109

www.rotel.com